

# FLOORING SURFACES SUPER TIMESTEP

For Architects,  
Specifiers and  
General Contractors

## *Special Features*

- Heavy duty
- Multi-purpose
- Ideal for tap and percussive dance
- Ultimate studio floor
- Life expectancy: up to 18 years
- Portable or permanent
- Guarantee: 7 years against wear

The ultimate multi-purpose studio and tour floor. Flexibility of a marley-type floor and virtually indestructible.

### **ACTIVITY**

Great for all styles of dance, including ballet, tap, theatrical, jazz, modern and Spanish dance.

### **INSTALLATION**


Super Timestep can be installed directly on a floating wood subfloor or hard wood surface, temporarily, semi-permanently, or permanently. It can be installed over wood flooring, using double-faced tape, adhesive or Re-Use-It.

### **MAINTENANCE**

Clean weekly, using a detergent/degreaser that does not leave a residue. Heavy tap use may require a protective finish..

### **SUPER TIMESTEP**

#### *Stock Colors*

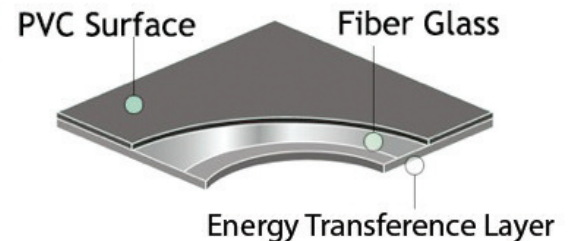

“Eco-friendly” products meet one or more of the following criteria: recyclable, reusable, made from recycled post consumer materials, made from renewable sources, made from managed forests, packaged in recyclable containers, made from recoverable waste materials or have no VOC's.

See reverse side for flooring specifications and MSDS Ratings.

# **STAGESTEP**

Flooring Systems for Dance, Theatre and the Performing Arts.

800-523-0960 (Toll free in the U.S. & Canada) • 215-636-9000

www.stagestep.com • stagestep@stagestep.com

# FLOORING SURFACES SUPER TIMESTEP

For Architects,  
Specifiers and  
General Contractors

## TYPE

Multi-purpose, heavy duty, portable and permanent flooring

## COLORS

Standard: black and grey

## THICKNESS

.09"  
2.3 mm

## WIDTH & LENGTH

6.56' x 65' = 426.4 ft<sup>2</sup>  
2 lm x 20 lm = 40 lm<sup>2</sup>

## WEIGHT

5.5 lbs. per sq. yd.  
2.98 kg per sq. meter

## TECHNICAL DATA

Total Weight	EN 430 g/m <sup>2</sup>	2982
--------------	-------------------------	------

Deceleration = Safety	NF P90-104	n/a
-----------------------	------------	-----

Indentation (mm)	NFT 54 209	≤0,5 mm0,35
------------------	------------	-------------

Sliding	P 90-106	≤80<G<105
---------	----------	-----------

Abrasion Resistance	NF P90-102	<0,8g 0,20g
---------------------	------------	-------------

Brightness	NFT 30-064	<12
------------	------------	-----

Fire Safety Rating/ Flammability		
-------------------------------------	--	--

NF P 92-512	
EN 13501-1	M3
ÖNORM B 3810 &	C fl - S1
ÖNORM B 3800/1 /	B1 - Q1
DIN 4102	

Dimension Stability	EN 434 (+/-)	0,2 %
---------------------	--------------	-------

Color Fastness	ISO 105B02	>6
----------------	------------	----

Resistance to Chemicals	EN 423	No change
-------------------------	--------	-----------

For information regarding handling and installation, adhesives, maintenance, applications and chemical resistance, consult Stagestep.

Information on this specification sheet supercedes all materials published prior to April 2011.

# STAGESTEP

Flooring Systems for Dance, Theatre and the Performing Arts.

800-523-0960 (Toll free in the U.S. & Canada) • 215-636-9000

www.stagestep.com • stagestep@stagestep.com