

FLOORING SURFACES

SUPER BRAVO B & SUPER BRAVO CLASSIC

For Architects,
Specifiers and
General Contractors

Special Features

- Lightweight
- Low price
- Reversible
- Easy maintenance
- Life expectancy: up to 10 years
- Guarantee: 5 years against wear

New and improved reversible, lightweight, portable “marley-type” flooring. Now in wider widths and heavy duty wear surfaces. A fiberglass lining improves stability and offers better lie-flat to subfloor.

ACTIVITY


Superior work surface for jazz, modern, ballet, and other movement activities. Not recommended for tap.

INSTALLATION

While these floors can be permanently installed with Stagestep adhesive, most installations are semi-permanent, using double-faced tape or our Re-Use-It System.


MAINTENANCE

Clean weekly, using Proclean a detergent/degreaser that does not leave a residue.


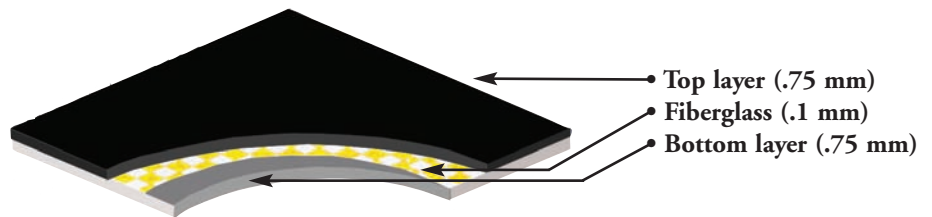


“Eco-friendly” products meet one or more of the following criteria: recyclable, reusable, made from recycled post consumer materials, made from renewable sources, made from managed forests, packaged in recyclable containers, made from recoverable waste materials or have no VOC’s.

SUPER BRAVO B



SUPER BRAVO CLASSIC



See reverse side for flooring specifications and MSDS Ratings.

STAGESTEP

Flooring Systems for Dance, Theatre and the Performing Arts.

800-523-0960 (Toll free in the U.S. & Canada) • 215-636-9000

www.stagestep.com • stagestep@stagestep.com

FLOORING SURFACES

SUPER BRAVO B & SUPER BRAVO CLASSIC

TYPE

Lightweight, portable “marley-type” flooring

COLORS

Super Bravo B:
Matte reversible black/black and grey/grey

Super Bravo Classic:
Matte reversible black/grey and black/white

THICKNESS

.06"
1.6 mm
(with fiberglass lining)

WIDTH & LENGTH

6.56' x 98' = 642.88 ft²
2 lm x 30 lm = 60 lm²

WEIGHT

4 lbs. per sq. yd.
2.17 kg per sq. meter

QUALITY STANDARDS

Super Bravo B and Super Bravo Classic are manufactured to meet all the performance requirements of the listed standards:

Europe: EN 649: 1996

USA: ASTM F1913; F1700

Australia: AS2055.1(sheet)

Canada: CSA A126.6

Agrément: G5ws -

Use area classification: EN 685:23 23/34/43

FIRE RATINGS

ASTM 648

SLIP RESISTANCE

Class D (dry conditions)
>.60/ASTM D2047 and ADA

DIMENSIONAL STABILITY

Casters OK
Sound Reduction 10 dbs

NOTES

For information regarding handling and installation, adhesives, maintenance, applications and chemical resistance, consult Stagestep.

Information on this specification sheet supercedes all materials published prior to April 2011.

STAGESTEP

Flooring Systems for Dance, Theatre and the Performing Arts.

800-523-0960 (Toll free in the U.S. & Canada) • 215-636-9000

www.stagestep.com • stagestep@stagestep.com