

FLOORING SURFACES WOODSTEP COLLECTION

For Architects,
Specifiers and
General Contractors

Special Features

- Heavy duty
- It really looks and feels like wood without the high maintenance expense
- Excellent for commercial and home use
- Life expectancy: up to 18 years
- Guarantee: 7 years against wear

Slightly textured, heavy duty surface. Exceptionally realistic wood design combines form and function. Resists wear and tear. Woodstep is used in conjunction with floating wood subfloor. Woodstep Plus and Woodstep Ultra can be installed directly over slab.

ACTIVITY

Recommended for ballet, tap, jazz, modern dance, and virtually all movement activities. Defective taps can cause scratches which will show because of the wood grain. Woodstep Plus and Woodstep Ultra will reduce sound of tap and clogging.


INSTALLATION

Woodstep can be installed directly on a floating wood subfloor or hardwood surface, temporarily, semi-permanently or permanently. Woodstep Plus/Woodstep Ultra can be installed over existing smooth concrete slab using double-faced tape, adhesive or Re-Use-It. (Slab should be sealed against moisture.)


MAINTENANCE

These acid and food stain resistant flooring systems need to be cleaned with a detergent/degreaser (Proclean) once a week.


WOODSTEP

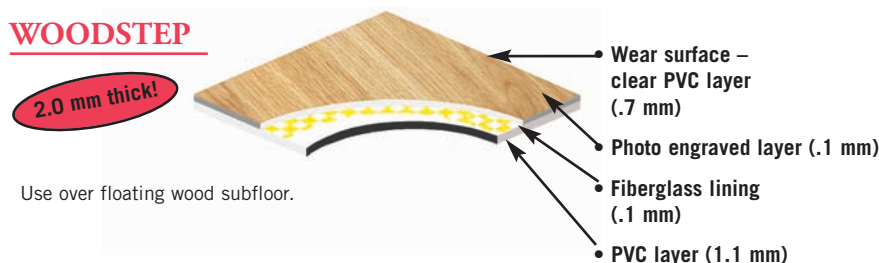

WOODSTEP PLUS

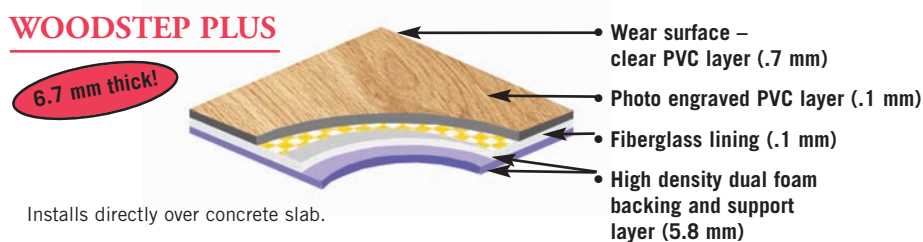

WOODSTEP ULTRA

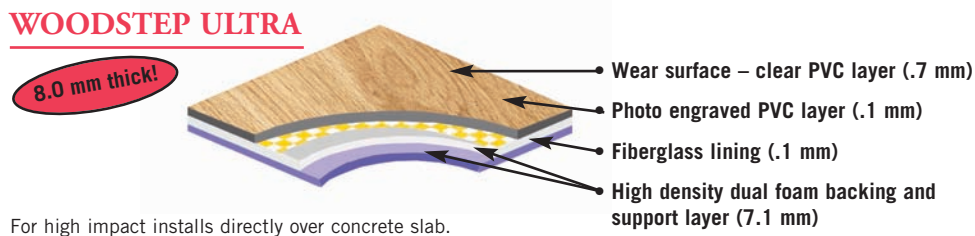

See reverse side for flooring specifications and MSDS Ratings.

STAGESTEP

Flooring Systems for Dance, Theatre and the Performing Arts.

800-523-0960 (Toll free in the U.S. & Canada) • 215-636-9000

www.stagestep.com • stagestep@stagestep.com

FLOORING SURFACES

WOODSTEP COLLECTION

TYPE

Woodstep: Hardwearing, heterogenous contract floorcovering.

Woodstep Plus/Woodstep Ultra: Hardwearing, heterogenous, cushion backed, contract floorcovering.

COLORS

See cross sections on reverse side.
Woodstep: Oak in stock.
Custom color available.

Woodstep Plus/Woodstep Ultra:
Available in Maple only

THICKNESS

Woodstep: .080"
2.0mm

Woodstep Plus: .264"
6.7mm

Woodstep Ultra: .315"
8mm

WIDTH & LENGTH

Woodstep:
6.56' x 65' = 426.4 ft²
2 lm x 20 lm = 40 lm²

Woodstep Plus:
6.56' x 60' = 393.6 ft²
2 lm x 18.5 lm = 37 lm²

Woodstep Ultra:
6.56' x 60' = 393.6 ft²
2 lm x 18.5 lm = 37 lm²

WEIGHT

Woodstep:
6.5 lbs. per sq. yd.
3.53 kg per sq. meter

Woodstep Plus:
7.7 lbs. per sq. yd.
4.18 kg per sq. meter

Woodstep Ultra:
8.5 lbs. per sq. yd.

QUALITY STANDARDS

Woodstep Collection is manufactured to meet all the performance requirements of the listed standards:

Europe: EN 649: 1996
USA: ASTM F1913; F1700
Australia: AS2055.1(sheet)
Canada: CSA A126.6
Agrément: G5ws
Use area classification: EN 685: 23/34/43

FIRE RATINGS

ASTM E648-97 E662 C1D28 89
NFPA 253 E662
NFPA 372 258

SLIP RESISTANCE

Class D (dry conditions)
>.60/ASTM D2047 and ADA

DIMENSIONAL STABILITY


Casters OK
Sound Reduction 59 dbs

NOTES

For information regarding handling and installation, adhesives, maintenance, applications and chemical resistance, consult Stagestep.

Information on this specification sheet supercedes all materials published prior to April 2011.

Woodstep Collection Stock Colors Available Available for immediate shipment



STAGESTEP

Flooring Systems for Dance, Theatre and the Performing Arts.

800-523-0960 (Toll free in the U.S. & Canada) • 215-636-9000

www.stagestep.com • stagestep@stagestep.com