

# FLOORING SURFACES SUPER BRAVO B & SUPER BRAVO CLASSIC

For Architects,  
Specifiers and  
General Contractors

## Special Features

- Lightweight
- Low price
- Reversible
- Easy maintenance
- Life expectancy: up to 10 years
- Guarantee: 5 years against wear

New and improved reversible, lightweight, portable “marley-type” flooring. Now in wider widths and heavy duty wear surfaces. A fiberglass lining improves stability and offers better lie-flat.

### ACTIVITY


Superior work surface for jazz, modern, ballet, and other movement activities. Not recommended for tap.

### INSTALLATION

While these floors can be permanently installed with Stagestep adhesive, most installations are semi-permanent, using double-faced tape or our Re-Use-It System.


### MAINTENANCE

Clean weekly, using Proclean a detergent/degreaser that does not leave a residue.

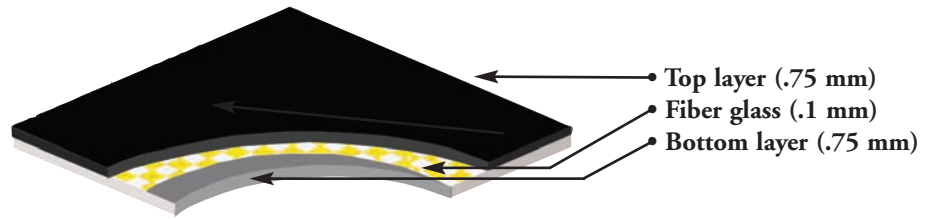


“Eco-friendly” products meet one or more of the following criteria: recyclable, reusable, made from recycled post consumer materials, made from renewable sources, made from managed forests, packaged in recyclable containers, made from recoverable waste materials or have no VOC’s.

### SUPER BRAVO B



### SUPER BRAVO CLASSIC



See reverse side for flooring specifications and MSDS Ratings.

**STAGESTEP**

Flooring Systems for Dance, Theatre and the Performing Arts.


**aeson**  
FLOORING SYSTEMS

Leading The Way In Health & Fitness Flooring

800-523-0960  
215-636-9000

(Toll free in U.S. & Canada)

www.stagestep.com • www.aesonflooring.com



# FLOORING SURFACES SUPER BRAVO B & SUPER BRAVO CLASSIC

## TYPE

Lightweight, portable "marley-type" flooring

## COLORS

Super Bravo B:  
Matte reversible black/black and grey/grey

Super Bravo Classic:  
Matte reversible black/grey and black/white

## THICKNESS

.06"  
1.6 mm  
(with fiberglass lining)

## WIDTH & LENGTH

6.58' x up to 98' = up to 644.84 ft<sup>2</sup>  
2m x up to 30m = up to 60m<sup>2</sup>

## WEIGHT

4 lbs. per sq. yd.

## QUALITY STANDARDS

Super Bravo B and Super Bravo Classic are manufactured to meet all the performance requirements of the listed standards:

Europe: EN 649: 1996

USA: ASTM F1913; F1700

Australia: AS2055.1(sheet)

Canada: CSA A126.6

Agrément: G5ws -

Use area classification: EN 685:23 23/34/43

## FIRE RATINGS

ASTM 648

## SLIP RESISTANCE

Class D (dry conditions)  
>.60/ASTM D2047 and ADA

## DIMENSIONAL STABILITY

Casters OK  
Sound Reduction 10 db

## NOTES

For information regarding handling and installation, adhesives, maintenance, applications and chemical resistance, consult Stagestep/Aeson.

Information on this specification sheet supercedes all materials published prior to August 2009.

**STAGESTEP**

Flooring Systems for Dance, Theatre and the Performing Arts.

**aeson**  
FLOORING SYSTEMS

Leading The Way In Health & Fitness Flooring

800-523-0960 (Toll free in U.S. & Canada)  
215-636-9000

www.stagestep.com • www.aesonflooring.com